

In the event of primary system check valve leakage, the Schultz Air Guard check valve will prevent air from entering the filter vessel via the air eliminator. Introducing air into the filter separator increases the risk of an internal fire as well as contributing to microbiological growth. This check valve is easily installed above the air eliminator and is available in either 1/2 npt or 3/4 npt.


**MATERIALS DATA**

Body and Poppet	Stainless Steel
Spring	Stainless Steel
O-Ring	Viton

**TECHNICAL DATA**

Maximum Working Pressure	500 psi
Maximum Back Pressure	500 psi
Temperature Rating (F)	-20 to 375

**SCHULTZ AIR GUARD**

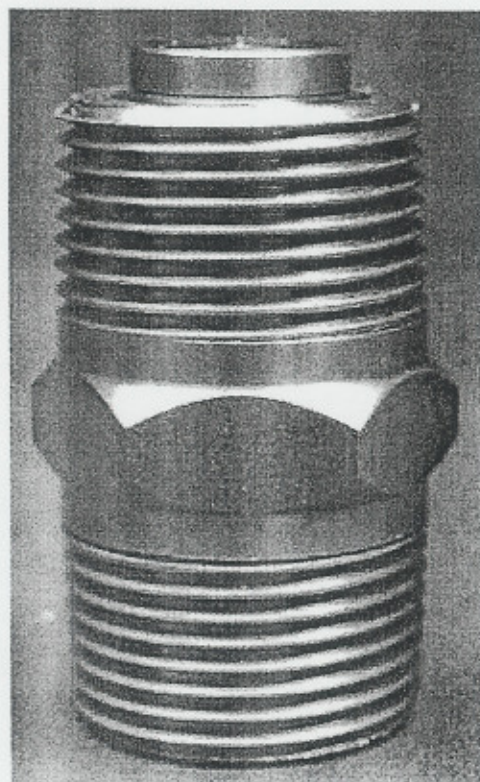

**CHECK VALVE  
 FOR AIR ELIMINATORS**

**ORDERING DATA**

Part #	NPT	HEX	LENGTH
SC-9650	1/2"	7/8"	1 7/8"
SC-9651	3/4"	1 1/8"	2 1/4"