



IC-101L
TS-101L

SEALED IN-LINE SERIES

- Provide bad taste & odor and chlorine taste & odor reduction
- Injection molded and pressure rated to 125 psi
- All in-line filters include a pre- and post-filter

Sealed In-Line filters feature coconut shell, granular activated carbon, and are designed to reduce unwanted taste, odor and chlorine taste & odor.

The TS-101L contains a combination of GAC and polyphosphate crystals to inhibit lime/scale build-up.

All Sealed In-Line filters include a durable, injection molded polypropylene body and cap, pre- and post-filter and are pressure rated to 125 psi. Available with 1/4" NPT connections.

Sealed In-Line filters are an ideal choice for post-RO, under-sink, ice-maker and food service applications.


Contact factory regarding availability of other sizes and media.



Pure Quality.™

SEALED IN-LINE SERIES

Disposable In-Line Filters

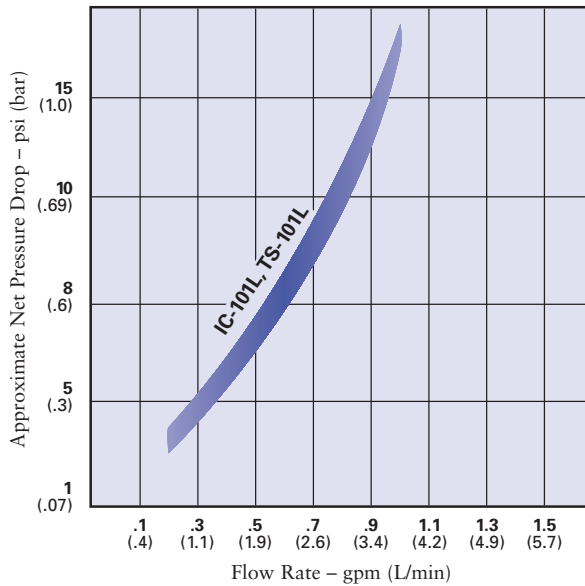

The IC-101L and TS-101L are Tested and Certified by NSF International.

System Specifications and Performance Data

Model	Media	Maximum Dimensions	Estimated Life	Flow Rate (gpm)
IC-101L	Coconut Shell GAC 17 cu. in.	2" x 10-1/2" (51 mm x 270 mm)	2,500 gallons (9,460 liters)	0.75 gpm (2.8 L/min)
TS-101L	Phosphate/GAC 16 cu. in.	2" x 10-1/2" (51 mm x 270 mm)	1,700 gallons (6,450 liters)	0.75 gpm (2.8 L/min)

Materials of Construction

- Body Polypropylene
- Cap Polypropylene
- Pre-filter and Post-filter Polypropylene
- Carbon Coconut Shell GAC
- Maximum Temperature 100°F (37.8°C)
- Operating Pressure 125 psi (8.62 bar)

WARNING: For drinking water applications, do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.
NOTE: Cartridges will contain a very small amount of fines (very fine powder) and new cartridges, after installation, should be flushed with sufficient water to remove all traces of fines from your water system before use. Each time you use your filtered water tap for drinking or cooking purposes, it is recommended that you run (flush) the tap for at least 10 seconds prior to using the water. This is particularly important if the water tap has not been used daily.
CAUTION: Protect against freezing to prevent cracking of the filter and water leakage.



502 Indiana Avenue • P.O. Box 1047 • Sheboygan, Wisconsin 53082-1047
 Customer Service: 800-645-0267 • Fax: 888-203-7361 • supportspecialist@pentekfiltration.com
 International: 920-457-9435 • Fax: 920-457-2417 • international@pentekfiltration.com
www.pentekfiltration.com

